

01/15/99



J0616 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0851-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	298-73
First Inventor or Application Identifier	Thilo Weitzel
Title	A DEVICE TO DETECT OR GENERATE...
Express Mail Label No.	EL071684586 US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
- ☒ Specification [Total Pages 17]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - CIP/m(s)
  - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 4]
- Oath or Declaration [Total Pages ]
  - ☐ Newly executed (original or copy)
  - ☐ Copy from a prior application (37 C.F.R. § 1.53(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
    - ☐ **DECLARATION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.65(d)(2) and 1.33(b).
- ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - ☐ Computer Readable Copy
  - ☐ Paper Copy (identical to computer copy)
  - ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☒ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- ☐ Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
- ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
- ☐ Other: .....

\*NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.17), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.121).

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in the preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-In-part (CIP) of prior application No: \_\_\_\_\_  
Prior application Information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Rocco S. Barrese		
	c/o Dilworth & Barrese		
Address	333 Earle Ovington Blvd.		
City	Uniondale,	State	New York
		Zip Code	11553
Country	USA	Telephone	516-228-8484
		Fax	516-228-8516

Name (Print/Type)	George M. Kaplan	Registration No. (Attorney/Agent)	28, 375
Signature	<i>George M. Kaplan</i>	Date	1/15/99

Bureau Hour Statement: This form is estimated to take 6.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Patent and Trademark Office, Washington, DC 20231

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Thilo Weitzel

Docket: 298-73

Serial No.: Not yet assigned

Dated: January 15, 1999

Filed: Simoultaneously

For: A DEVICE TO DETECT OR GENERATE OPTICAL SIGNALS

Assistant Commissioner for Patents

Washington, DC 20231

PRELIMINARY AMENDMENT

Sir:

Please enter the following Preliminary Amendment in the above-identified

application:

IN THE SPECIFICATION:


Page 1, between lines 5 and 6 insert --BACKGROUND OF THE INVENTION--

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this Preliminary Amendment is being deposited with the United States Postal Service on this date January 15, 1999 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL071684586US addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

George M. Kaplan

(Type or print name of person mailing paper)

  
(Signature of person mailing paper)

Page 2, line 5, change "polarisation" to --polarization--;

line 6,, change "fibres" to --fibers--;

Page 3, line 6, change " stabilised" to --stabilized--;

Page 4, line 4, change "stabilisation" to --stabilization--;

Between lines 22 and 23 insert --SUMMARY OF THE INVENTION--;

Page 6, line 22, change " claim 3" to --means for generating at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, including a beam splitter and a frequency shifter and/or frequency modulator or a phase shifter and/or phase modulator and/or travel distance--;

Page 8, between lines 4 and 5 insert --BRIEF DESCRIPTION OF THE DRAWINGS--;

Lines 6-7, change ". Here" to --, wherein-- ;

between lines 15 and 16 insert --DESCRIPTION OF THE PREFERRED EMBODIMENTS--; and

Page 9, line 16, change "centre" to --center--.

IN THE CLAIMS:

Please amend Claims 1-9 and 11-18 as follows and add Claims 19 and 20:

Claim 1, line 10, change "characterised in that" to --wherein--;

Claim 2, line 9, change "characterised in that" to --wherein--;

Claim 3, line 1, change "either of claims" to --claim-- and delete "or 2";

Claim 4, line 1, change "one or more of claims" to --claim-- and delete "to 3";

Claim 5, line 1, change "one or more of claims" to --claim-- and delete "to 4";

Claim 6, line 1, change "one or more of claims" to --claim-- and delete "to 5";

Claim 7, line 1, change "one or more of claims" to --claim-- and delete "to 6";

Claim 8, line 1, change "one or more of claims" to --claim-- and delete "to 7";

Claim 9, line 1, change "one or more of claims" to --claim-- and delete "to 8";

Claim 11, line 1, change "one or more of claims" to --claim-- and delete "to 10";

Claim 12, line 1, change "one or more of claims" to --claim-- and delete "to 11";

Claim 13, line 1, change "one or more of claims" to --claim-- and delete "to 12";

Claim 14, line 1, change "one or more of claims" to --claim-- and delete "to 13";

Claim 15, line 1, change "one or more of claims" to --claim-- and delete "to 14";

Claim 16, line 1, change "one or more of claims" to --claim-- and delete "to 15";

Claim 17, line 1, change "one or more of claims" to --claim-- and delete "to 16";

Claim 18, line 1, change "one or more of claims" to --claim-- and delete "to 17";

19. A device in accordance with claim 2, wherein the means (10, 11, 20, 80) to generate at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, include a beam splitter and a frequency shifter and/or frequency modulator or a phase shifter and/or phase modulation (20) and/or a travel distance (90).

20. A device in accordance with claim 2, wherein the means to generate at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement, include a local light source.

#### REMARKS

The claims in the application are 1-20.

Favorable reconsideration of the application as amended is respectfully requested.

The claims have been amended to eliminate all multiple dependencies with Claims 19 and 20 introduced in this regard. The specification has also been amended to eliminate informalities, with recitation from Claim 3 inserted therein to in accordance with M.P.E.P. § 608.01(I).

Early favorable action is earnestly solicited.

Respectfully submitted,



George M. Kaplan  
Registration No.28,375  
Attorney for Applicant(s)

DILWORTH & BARRESE  
333 Earle Ovington Blvd.  
Uniondale, NY 11553  
(516) 228-8484  
GMK/jkv

**Thilo Weitzel**  
**D-72070 Tübingen**

---

A device to detect or generate optical signals

---

The present invention relates to a device to detect optical signals with means to generate at least one reference light ray which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, with means with which the optical signal to be detected and/or the reference light ray(s) can be aligned in such a way that they can be brought into interference and with at least one detector with a demodulator by means of which amplitude modulation can be detected.

The invention further relates to a device to generate optical signals by means of modulation of optical carriers with means to generate at least one reference light ray which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical carrier to be modulated, with means with which the optical signal to be detected and/or the reference light rays can be aligned in such a way that they can be brought into interference and with at least one coupler by means of which the resulting interference signal can be coupled out.

The invention further relates to the use of a device in accordance with the invention as an optical receiver or an optical modulator or as a spectrometer.

The optical information transfer is based on different methods which are each based on the modulation of certain properties of the optical carrier wave. When a laser is used as the light source, information can be effected by time modulation of the amplitude, the frequency, the phase or the polarisation of the light source, with a modulation of the polarisation only being used in special cases due to technical difficulties in the transfer in optical fibres. The essential element of such methods for optical information transfer is the optical receiver which must be capable of recognising the relevant modulation within a very short time even at a very low intensity of the signal received.

The simplest method (direct detection) comprises the measurement of the intensity of the incident optical carrier. Accordingly, only a modulation of the intensity, i.e. amplitude modulation (amplitude shift keying, ASK) can be used as the modulation method. In addition, a very strong modulation of the frequency of the optical carrier can be detected by the receiver with the aid of one or more suitable optical filters directly as amplitude modulation, too.

The modulation forms of phase and frequency modulation require the overlapping in the receiver of the incident optical signal to be detected with a local reference light source (local oscillator, LO). Here, a difference is made between homodyne detection and heterodyne detection, with the reference light source possessing the same frequency as the optical signal to be detected in the first case and a different frequency in the second case. In the so-called quasi-heterodyne detection method, only the phase position of the reference light source is varied. The overlapping of optical signal and light of the reference light source leads to an interference signal from which, depending on the arrangement, the amplitude and phase or frequency of the signal to be detected can be derived with reference to the local reference source.



Furthermore, a difference is made between coherent (coherent detection) and non-coherent (non-coherent detection) receivers. While with coherent detection, the modulation of the interference signal is evaluated with amplitude and phase position, with non-coherent detection, only the intensity of the modulation is detected, i.e. in this case, the envelope curve of the interference signal is observed. In the case of coherent detection, the local reference source must be stabilised according to frequency and phase position and must track the incident optical carrier, while with the non-coherent detection, a control of the frequency of the local reference light source is sufficient.

The homodyne detection allows the measurement of the phase and thus of the phase modulation (phase shift keying, PSK) of the optical carrier wave; heterodyne detection also allows the detection of phase jumps in the optical carrier wave (differential phase shift keying, DPSK). The heterodyne detection is also used for the detection of a frequency modulation (frequency shift keying, FSK). In this case, the different frequencies can be detected electronically in the interference signal. Both the direct detection (ASK) and the heterodyne methods can transfer several sub-carriers modulated up in the radio wave range (sub-carrier modulation (SCM)). The SCM methods are gaining in significance as the bandwidth of the feasible single connections increases since a single optical channel can be used for several independent data streams.

The following are just some of the possibilities:

- Direct detection: ASK
- Heterodyne, non-coherent detection: ASK, FSK, DPSK
- Heterodyne, coherent detection: ASK, FSK, PSK
- Homodyne, coherent detection: ASK, PSK

The bandwidth of the signal which can be transferred and also the technical effort grow in accordance with this list. On the receiver side, coherent detection, in particular homodyne coherent detection, means a high technical effort due to the required stabilisation of the local reference light source.

To cover the range between bandwidths which can still be handled and processed electronically ( $<1$  GHz) and the transfer capacity of the optical systems, several optical carriers of different wavelengths can be used which use the optical system together, but which are used individually by independent transmitters/receivers. If a sufficiently high wavelength selectivity can be achieved, this wavelength division multiplexing procedure (WDM) allows the selection of a bandwidth for the modulation of the individual optical carriers suitable for the corresponding application and technology without essentially restricting the transfer capacity of the optical system (high density wavelength division multiplexing or hd WDM). One particularly interesting application field is represented by optical multi-channel networks as the ability of the receiver to select a single channel leads to a substantial simplification of the distribution nodes in the network (tunable channel, multi-access networks or TCMA).

The physical connection between the size of an optical element and its maximum possible spectral resolution does not allow spatially small elements a spectral resolution in the GHz range. While homodyne and heterodyne detection with a local reference light source allow a very high spectral resolution, the control of the reference light source requires a high technical effort.

It is therefore the object of the present invention to further develop a generic device to detect or generate optical signals in such a way that it possesses a high spectral resolution even when relatively small optical elements are used and the wavelength of the optical carrier to be received or modulated should be freely selectable without great technical effort being created for the control of a local reference light source.

This object is solved in accordance with the invention by at least one wavelength-dependent element being provided by means of which the angle(s) of the light rays brought to interference can be changed in dependence on the wavelength and by at least one of the detectors being designed in such a way or being in combination with a demodulator and/or with optical elements in such a way that a time and/or spatial modulation of the intensity with reference to the whole or parts of the detected ray cross-section can be measured.

If, in the otherwise unchanged device, instead of the (or at least one of the) detector(s), a coupler is inserted, the device can be used to generate optical signals by modulation of optical carriers and thus as a modulator. Based on a generic device to generate optical signals by modulation of optical carriers, the basic object is solved by at least one wavelength-dependent element being provided by means of which the angle(s) of the light rays brought to interference can be changed in dependence on the wavelength and by at least one of the couplers being designed in such a way or being in combination with a demodulator and/or with optical elements in such a way that the coupled out signal is dependent on the time and/or spatial modulation of the intensity with reference to the whole or parts of the ray cross-section detected.

In accordance with a preferred embodiment of the present invention, the means to generate at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, includes a beam splitter and a frequency shifter and/or frequency modulator or a phase shifter and/or phase modulator and/or a travel distance. This embodiment is advantageous as a local light source can be dispensed with. By dispensing with the local oscillator, the arrangement becomes technically substantially simpler, but nevertheless allows a high spectral resolution.

The means to generate at least one reference light ray which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, can include a local light source.

In another embodiment of the present invention, it is provided that at least one of the wavelength-dependent elements includes a diffracting optical element, in particular an optical grating, a hologram or a system of thin films.

At least one of the wavelength-dependent elements can include a dispersing optical element, in particular a prism.

It is especially advantageous, if the (or at least one of the) wavelength-dependent element(s) is designed as a beam splitter or combiner.

In accordance with one preferred embodiment of the present invention, at least one of the wavelength-dependent elements is designed in such a way that the type or degree of dependence of the angle deflection can be changed by the wavelength. In particular, a design as an acousto-optical modulator is possible.

The wavelength-dependent element can simultaneously be designed as a frequency shifter and/or frequency modulator or phase shifter and/or modulator. One or more of the wavelength-dependent elements can be designed as an acousto-optical modulator.

It is particularly advantageous if means are provided by means of which the reference light ray and/or the optical signal can be deflected.

Furthermore, at least one of the wavelength-dependent elements can be positioned in a rotating and/or swivel manner. With embodiment variations which can be derived from a device in accordance with claim 3, the wavelength of the signal to be demodulated can be freely set by adjusting the geometry. In particular, it is possible in

various variations of the device to adjust the wavelength by a simple turning of one of the optical elements.

In another embodiment of the present invention, at least one multiplex hologram is provided and/or other optical elements by means of which multiple rays can be handled simultaneously. By using multiplex holograms, reception can be performed simultaneously on multiple channels, if necessary with the aid of additional detectors.

In accordance with a preferred embodiment of the present invention, parts of the device are provided in multiple and/or multiple rays can be handled by parts of the devices named.

It is especially advantageous if means to change the ray cross-section of at least one of the rays involved are provided. In this case, the incident ray does not necessarily have to be expanded prior to entering the apparatus. Depending on the arrangement of the dispersing or diffracting elements, the ray expansion can be performed at different points, also inside the device. The spectral resolution of the apparatus increases with the ray diameter, in particular with the ray diameter in the plane of the angle deflection of the wavelength-dependent elements.

In another embodiment of the present invention, means can be provided for the spectral filtration or spatial modulation of phase or amplitude of at least one of the rays involved. A suitable definition of the ray profile can further improve the spectral resolution.

It is particularly advantageous if all or one part of the rays involved are directed wholly or partially through waveguides and/or if all or one part of the optical elements are formed by means of the integrated optical system.

The invention relates further to the use of a device in accordance with the invention as the optical receiver or optical modulator or as the spectrometer. The use as the spectrometer is based on the wavelength selectivity of the device in accordance with the invention.

Further details and advantages of the device in accordance with the invention are explained in more detail by means of an example embodiment shown in the drawing. Here

Fig. 1: shows the spatial and time modulation of the intensity at the location of a detector;

Fig. 2: shows a principle design of a device in accordance with the invention using the ray path of a Michelson interferometer;

Fig. 3 shows a principle design of a device in accordance with the invention using the ray path of a Mach-Zehnder interferometer; and

Fig. 4 shows a principle design of a device in accordance with the invention wherein one of the partial rays is delayed in time.

The functional principle of the present invention is based on the fact that the information transferred by the incident light ray (optical signal to be detected) or by the coupled out light ray (modulated optical carrier) is represented exclusively by time modulation of amplitude, wavelength or relative phase position. The angles of incidence or emergence of the rays do not carry any information, but are, in contrast, as a rule kept constant. Furthermore, the rays do not carry any spatial modulation.

The device in accordance with the invention transmits the spectral properties of the suitably expanded incident light ray in the angle space. The different angle

components can now be imaged by interference with a suitably generated reference ray to a spatial modulation, with the different angle components showing a characteristic interference pattern in each case. By means of a heterodyne or quasi-heterodyne procedure, interference patterns matching certain angle components can be detected with high selectivity and sensitivity.

Unlike standard spectrometers with dispersing or diffracting elements, with this new method the different spectral components do not have to be separated spatially for detection.

By way of illustration, Fig. 1 shows the resulting spatial and time modulation of the intensity at the site of one of the detectors for a simple arrangement with flat waves. If the device is adjusted to the wavelength of the incident light ray, the period of the spatial modulation of the interference pattern occurring at the detector is very large. In particular, the spatial period of this interference pattern can become larger than the ray cross-section detected by the detector. Figs. 1 a) and 1 b) show this situation for two points of time with relative phase positions of the partial rays being different by  $\pi$ . The marked region at the centre of the interference pattern shown represents the range of the rays detected by the detector.

Any change in the relative phase position of the partial rays leads to a lateral shift in the interference pattern. In the situation shown, this leads to very high time modulation of the intensity integrated over the area detected. Even very small differences in the wavelength of the incident light ray lead to a great shortening of the period of the interference pattern in each case. Figs. 1 c) and 1 d) show such a situation for two points of time with relative phase positions of the partial rays differing by  $\pi$ . The area detected by the detector overlaps several light and dark strips. As the number of strips increases, the time modulation of the interference signal integrated over the area detected which can be measured for a lateral shift of the interference pattern falls rapidly.

Fig. 2 shows the principle design of a simple embodiment of a device in accordance with the invention using the ray path of a Michelson interferometer with the beam splitter 10. A prism 12 is used as the wavelength-dependent element. One of the mirrors 20 forms, by suitable means to shift this mirror, a phase modulator; the other mirror 30 is pivoted in a suitable manner to adjust the wavelength to be detected. The detector 40 has an areal design and integrates the intensity over the whole cross-section of the ray detected. A lock-in amplifier is used as the demodulator 50. To control the mirror 20 designed as a phase modulator, the modulator control 60 is used.

Fig. 3 shows the principle design of a simple embodiment of a device in accordance with the invention using the ray path of a Mach-Zehnder interferometer. The first beam splitter 11 is designed as a diffracting optical element and so itself forms the wavelength-dependent element. One of the mirrors 20 forms, by suitable means to shift this mirror 20, a phase modulator; the other mirror 30 is pivoted in a suitable manner to adjust the wavelength to be detected. The partial rays brought to interference by the second beam splitter 13 (combiner) are detected by two detectors 40, 40'. The detectors 40, 40' have an areal design and integrate the intensity over the whole cross-section of the ray detected in each case. A lock-in amplifier with differential input is used as the demodulator 50. To control the mirror 20 designed as a phase modulator, the modulator control 60 is used.

Fig. 4 shows the principle design of an embodiment of the device in accordance with the invention with a time shift between the reference and the signal rays. The change in the relative phase position between the partial rays is achieved by a time displacement of one of the partial rays (delay due to longer period), with a suitable phase modulation or frequency modulation of the signal being a pre-requisite in this case. The incident signal is guided through a glass fibre 70. The first beam splitter 80 is designed with means of fibre glass technology. One part of the signal is expanded after a short period and guided to the conventionally designed second beam splitter 13



via a mirror 30 pivoted in a suitable manner to adjust the wavelength to be detected. The other ray is delayed by a suitably sized travel distance 90, then expanded and guided to the second beam splitter 13 via the wavelength-dependent element 14 designed here as a diffracting optical element. The partial rays brought to interference by the second beam splitter 13 (combiner) are detected by detectors 40, 40'. The detectors 40, 40' have an areal design and integrate the intensity over the whole cross-section of the ray detected in each case. The demodulator 50 is realised electronically and must have a varying design dependent on the modulation type of the signal.

**Thilo Weitzel**  
**D-72070 Tübingen**

---

A device to detect or generate optical signals

---

**Claims**

1. A device to detect optical signals with

means (10, 11, 20, 80) to generate at least one reference light ray which has frequency shift and or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected;

means (20, 30) with which the optical signal to be detected and/or the reference light ray(s) can be aligned in such a way that they can be brought to interference;

and with at least one detector (40) with a demodulator (50) by which amplitude modulation can be detected

**characterised in that**

at least one wavelength-dependent element (11, 12, 14) is provided by means of which the angle(s) of the light rays brought to interference can be changed in dependence on the wavelength, and

at least one of the detectors (40) is designed in such a way or is in combination with a demodulator (50) and/or with optical elements in such a way that a time and/or spatial modulation of the intensity with reference to the whole or parts of the ray cross-section detected can be measured.

2. A device to generate optical signals by modulation of optical carriers with

means to generate at least one reference light ray which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical carrier to be modulated;

means with which the optical signal to be detected and/or the reference light ray(s) can be aligned in such a way that they can be brought to interference;

and with at least one coupler by means of which the resulting interference signal can be coupled out,

**characterised in that**

at least one wave-dependent element is provided by means of which the angle(s) of the light rays brought to interference can be changed in dependence on the wavelength, and

at least one of the couplers is designed in such a way or is in combination with a demodulator and/or with optical elements in such a way that the coupled out

signal is dependent on the time and/or spatial modulation of the intensity with reference to the whole or parts of the ray cross-section detected.

3. A device in accordance with either of claims 1 or 2, wherein the means (10, 11, 20, 80) to generate at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, include a beam splitter and a frequency shifter and/or frequency modulator or a phase shifter and/or phase modulator (20) and/or a travel distance (90).
4. A device in accordance with one or more of claims 1 to 3, wherein the means to generate at least one reference light ray, which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement, include a local light source.
5. A device in accordance with one or more of claims 1 to 4, wherein at least one of the wavelength-dependent elements (11, 12, 14) includes a diffracting optical element, in particular an optical grating (11, 14), a hologram or a system of thin films.
6. A device in accordance with one or more of claims 1 to 5, wherein at least one of the wavelength-dependent elements (11, 12, 14) includes a dispersing optical element, in particular a prism (12).
7. A device in accordance with one or more of claims 1 to 6, wherein at least one of the wavelength-dependent elements (11, 12, 14) is designed as a beam splitter (11) or a combiner.

8. A device in accordance with one or more of claims 1 to 7, wherein at least one of the wavelength-dependent elements (11, 12, 14) is designed in such a way that the type or degree of dependence of angle deflection can be changed by the wavelength.
9. A device in accordance with one or more of claims 1 to 8, wherein at least one of the wavelength-dependent elements is simultaneously designed as a frequency shifter and/or frequency modulator or a phase shifter and or phase modulator.
10. A device in accordance with claim 9, wherein one or more of the wavelength-dependent elements is designed as an acousto-optical modulator.
11. A device in accordance with one or more of claims 1 to 10, wherein means are provided by means of which the reference light ray and/or the optical signal can be deflected.
12. A device in accordance with one or more of claims 1 to 11, wherein at least one of the wavelength-dependent elements (11, 12, 14) is positioned in a rotating and/or swivelling manner.
13. A device in accordance with one or more of claims 1 to 12, wherein at least one multiplex hologram is provided and/or other optical elements by means of which multiple rays can be handled simultaneously.
14. A device in accordance with one or more of claims 1 to 13, wherein parts of the device are provided in multiple and/or by means of parts of the devices named, multiple rays can be handled.

15. A device in accordance with one or more of claims 1 to 14, wherein means are provided to change the ray cross-section of at least one of the rays involved.
16. A device in accordance with one or more of claims 1 to 15, wherein means are provided for the spectral filtration or spatial modulation of phase or amplitude of at least one of the rays involved.
17. A device in accordance with one or more of claims 1 to 16, wherein all or a part of the rays involved are guided wholly or partially through wave guides and/or wherein all or a part of the optical elements are formed by means of the integrated optics.
18. The use of a device in accordance with one or more of claims 1 to 17 as the optical receiver or optical modulator or as the spectrometer.

**Thilo Weitzel**  
**D-72070 Tübingen**

---

A device to detect or generate optical signals


---

**Abstract**


The present invention relates to a device to detect optical signals with means to generate at least one reference light ray which has frequency shift and/or frequency modulation or phase shift and/or phase modulation and/or time displacement over the optical signal to be detected, with means with which the optical signal to be detected and/or the reference light ray(s) can be aligned in such a way that they can be brought into interference and with at least one detector with a demodulator by means of which amplitude modulation can be detected. A high spectral resolution of the device is achieved even when small optical elements are used by at least one wavelength-dependent element being provided by means of which the angle(s) of the light rays brought to interference can be changed in dependence on the wavelength and by at least one of the detectors being designed in such a way or being in combination with a demodulator and/or with optical elements in such a way that a time and/or spatial modulation of the intensity with reference to the whole or parts of the detected ray cross-section can be measured. The invention relates further to a device to generate optical signals by means of modulation of optical carriers and the use of a device in accordance with the invention as the optical receiver or optical modulator or as the spectrometer.

Fig. 1


a)




b)



c)



d)



002210.011509



Fig. 2

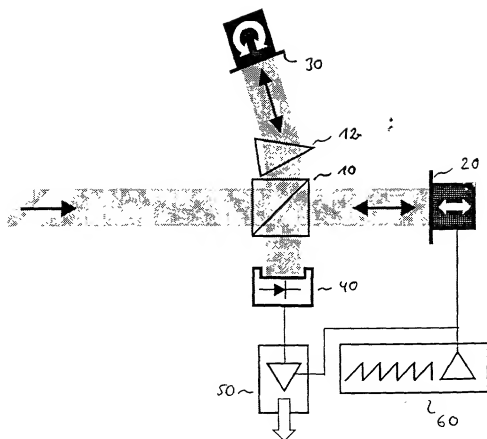


Fig. 3

